


Indirect LED Archi Linear Light (T=1.77inch)

## Product Description:


WL-MSUD series led linear lights was designed professionally, upgrade from the traditional flood lighting, assembly with top quality parts, minimalist design with scientific structure, can free combination, specialize optical design with optional beam angle.

WL-MSUD series linear light design with an outstanding combination of spotlighting and flood lighting, eliminate glaring, do whatever you want by choosing a right combination, suit for places with high requirement of lighting.

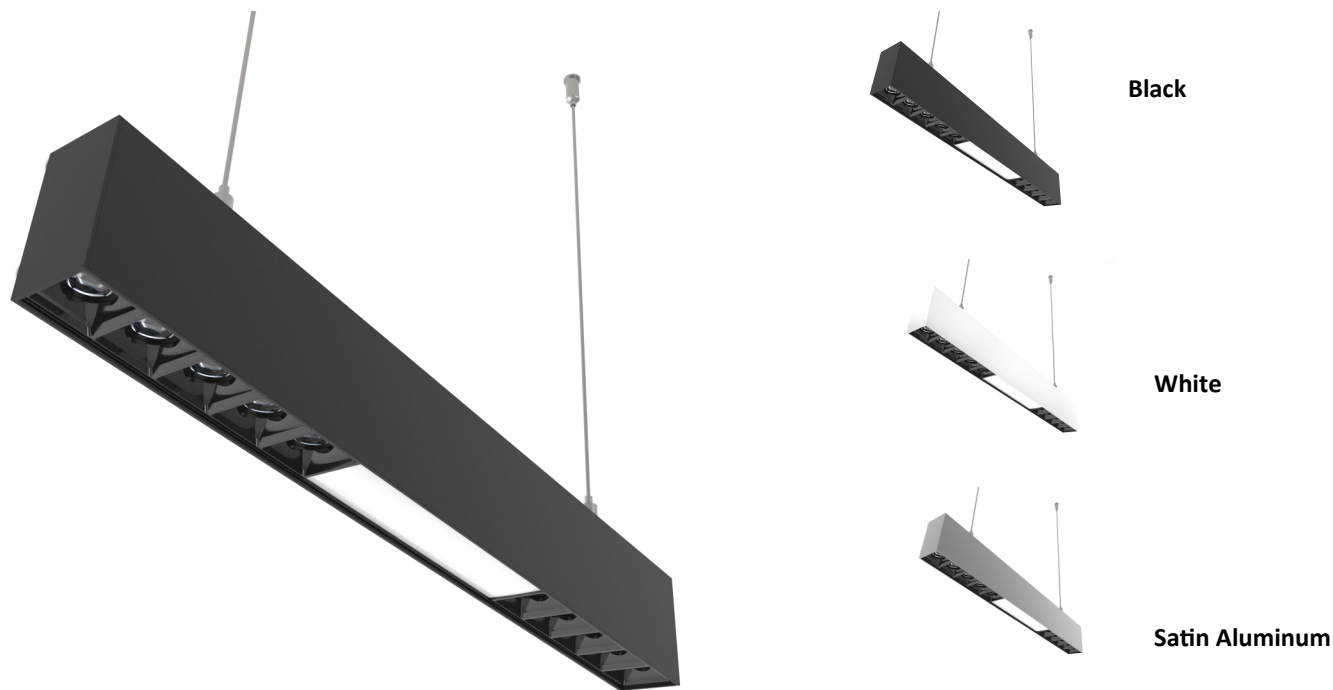

Note: Available in custom finish


## Features:

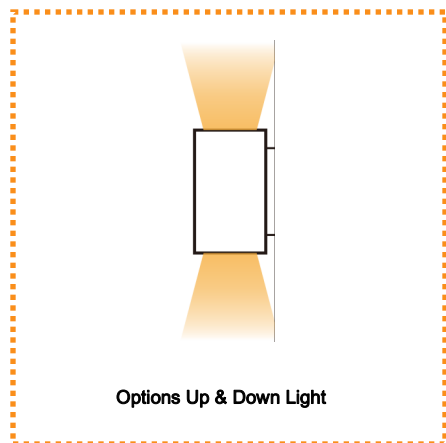

# WL-MSUD Series


Indirect LED Archi Linear Light (T=1.77inch)

## Dimension:

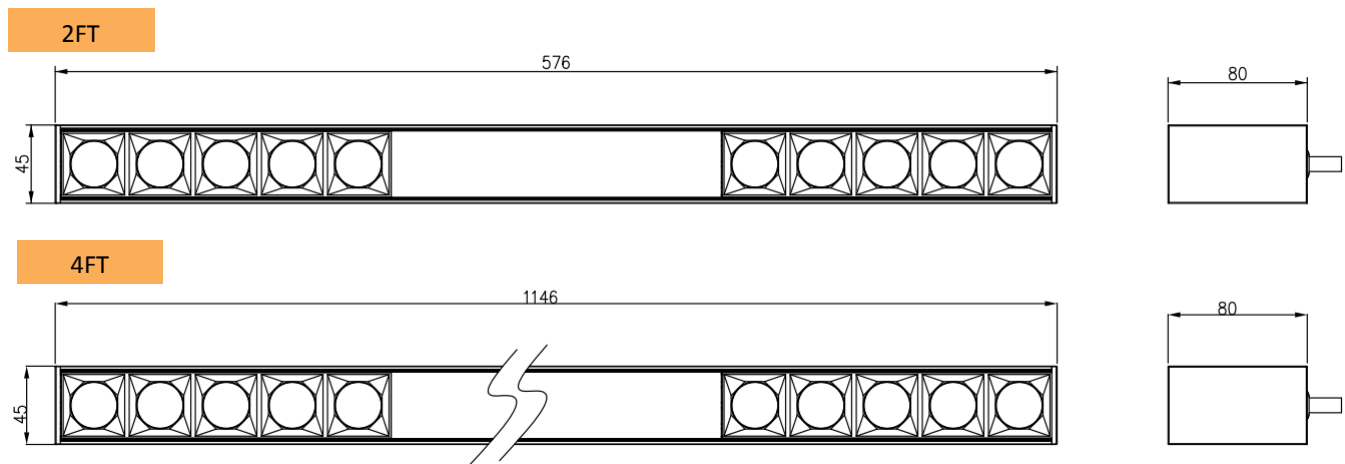


Note:8FT is available

## Applications:

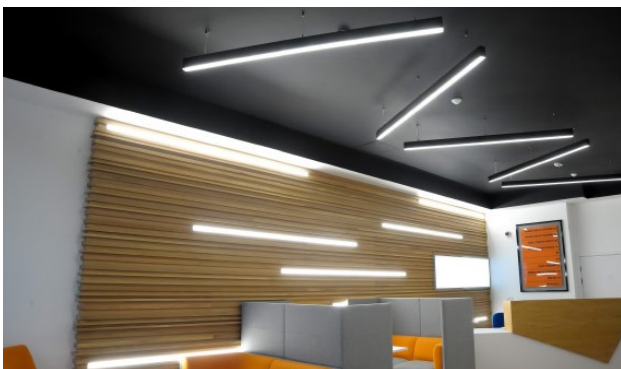

Indirect LED Archi Linear Light (T=1.77inch)

## Beam Angles Options:



12°




24°




38°




50°




50°x50°



70°x70°



35°x70°




90°x90°




Polarization

## Mounting Options:



Wall Mount



Suspend mount

## Mounting Options:




Wall mount




Linkable Bracket



Accent









Louver Optics



Glare-free Louver

Indirect LED Archi Linear Light (T=1.77inch)

## Direct Accent Configuration Options:

A1	 <p>Recessed downlight located at Edge</p>
A2	 <p>Recessed downlight located at middle</p>
A3	 <p>Recessed downlights x2</p>
A4	 <p>Recessed downlights x3</p>
A5	 <p>Recessed downlights x4</p>
A6	 <p>Recessed downlight full</p> <p>Full 2ft section fits max.3 recessed downlights</p> <p>Full 4ft section fits max.6 recessed downlights</p> <p>Full 8ft section fits max.12 recessed downlights</p>


## Pattern Options:



L-Shape



T-Shape



Cross-Shape



Or no any requirement of Pattern

Indirect LED Archi Linear Light (T=1.77inch)

## Product Models

MODEL	WL-MSUD2FT25WADHV-XXK- XXD	WL-MSUD4FT50WADHV-XXK- XXD	WL-MSUD4FT50WBDHV-XXK- PC	WL-MSUD8FT100WBDHV-XXK- PC
<b>PERFORMANCE SUMMARY</b>				
Input Wattage	25W (Up 8W,Down 15W)	50W(Up 15W,Down 35W)	50W(Up 15W,Down 35W)	100W(Up 30W,Down 70W)
Input Voltage	120-347V			
Delivered Lumens	3250Lm	6500Lm	6500Lm	13000Lm
Efficacy	130lm/W			
CRI	80min (CRI 90 available)			
CCT	3500K,4000K,4500K,5000K			
Power Factor	> 0.9			
THD	< 20%			
Operation Temp	-40°C-+50°C			
Beam Angle	120°			
Lens	PC		Accent	
Beam Angle (Accent)	120°		12°,24°,38°,50°,50°x50°,70°x70°,35°x70°,90°x90°,Polarization	
Pattern Options	L-Shape, T-Shape, Cross-Shape (Or no any requirement of Pattern)			
Finish	Black, White, Satin Aluminum, (Custom Finish available)			
Installation	Surface Mount, Suspend Mount ,Wall Mount			
<b>LIGHTING CONTROL</b>				
Dimming Capacity	0-10V dimming ,2.4G,DALI			
<b>DIMENSION</b>				
Product Dimension	576x45x80mm	1146x45x80mm	1146x45x80mm	2286x45x80mm
Packing Dimension				
<b>LONGEVITY &amp; WARRANTY</b>				
L80 Life	>50000hrs			
Warranty	5 Years			

Note:The first "XX" in the model means CCT ,can be 35,40,45,50;the second "XX" in the model means the beam angle ,can be 12,24,38,50,50X50,70X70,35X70,90X90,PD.

Indirect LED Archi Linear Light (T=1.77inch)

## Order Information :

Eg: WL-MSUD2FT36WHV-35KD1-A2-LS-S1-WH

1	2	3	4	5	6	7	8	9	10	11

1.Product Family	2.Series	3.Size	4.Watt	5.Voltage	6.CCT	7.Lens ( Beam Angle )
WL Wisdom Light	MSUD Direct & Indirect Archi- tecture Linear Light	2FT 2 feet	25W	HV 120-347V	35K 3500K	12D:12° 24D:24° 38D:38° 50D:50°
		4FT 4 feet	50W		40K 4000K 45K 4500K	50x50D:50°x50° 70x70D:70°x70°
		8FT 8 feet	72W		50K 5000K	35x70D:35°x70° 90x90D:90°x90° PD9:Polarization PC:120°

8.Accent Configuration	9.Pattern	10.Mounting Options	11.Finash
<p><b>A1</b>=Recessed downlight located at Edge</p> <p><b>A2</b>=Recessed downlight located at middle</p> <p><b>A3</b>=Recessed downlights x2</p> <p><b>A4</b>=Recessed downlights x3</p> <p><b>A5</b>=Recessed downlights x4</p> <p><b>A6</b>=Recessed downlight full</p> <p><b>Blank</b>=All PC lens</p>	<p><b>Blank</b> =No any requirement of Pattern</p> <p><b>LS</b> =L-Shape</p> <p><b>TS</b>=T-Shape</p> <p><b>CS</b>=Cross-Shape</p>	<p><b>S1</b>=Surface Mount</p> <p><b>S2</b>=Suspend Mount</p> <p><b>WM</b>=Wall Mount</p>	<p><b>WH</b>=White</p> <p><b>BK</b>=Black</p> <p><b>SA</b>=Satin Aluminum</p> <p><b>CF</b>=Custom finish</p>