

Direct & Indirect LED Slim-Line Linear Light (T=0.63inch)

Product Description:

WL-SSUD series slim Linear Pendant is a thin linear suspension light. Its slim profile makes it a perfect addition to all types of spaces. At only 1.6cm in thickness, the slim fixture is ideal for linear light application where a wide spread of light is required in minimal space. The Ultra Slim linear fixture can be specified in length of 3ft 4ft, corresponding to 25W or 36W . Its narrow fixture features a beam angle of 120° .

Features:


- Working voltage 120-347V
- Direct & Indirect luminaries
- Suspended & wall mount available with 3ft,4ft
- High lumens efficiency up to 105 lumens per watt
- Suspended with 1.6M steel wire rope
- Universal dimming like 0-10 dimming ,ELV, Dali ,Triac
- Specially designed light source with frost diffuser producing soft light
- 5 years warranty
- Applications: Office, meeting room, super market, restaurant ect.



WL-SSUD Series


Direct & Indirect LED Slim-Line Linear Light (T=0.63inch)

Dimension:

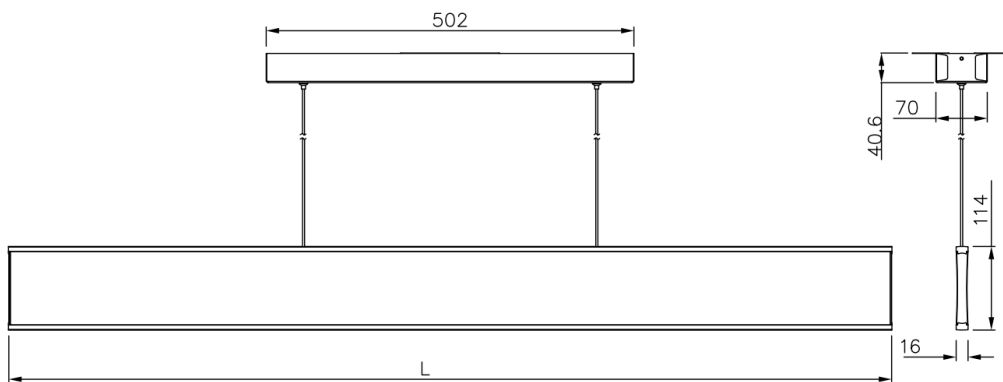


3FT	900*96*16mm (Driver Box: 502*70*40.6mm)
4FT	1200*96*16mm (Driver Box: 502*70*40.6mm)

Accessories:

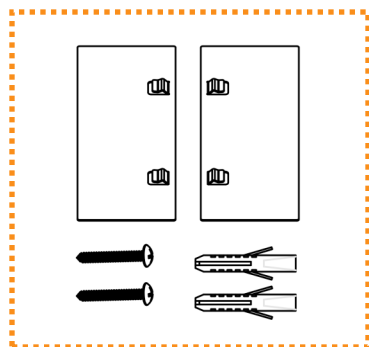

Mounting Screw and Plate

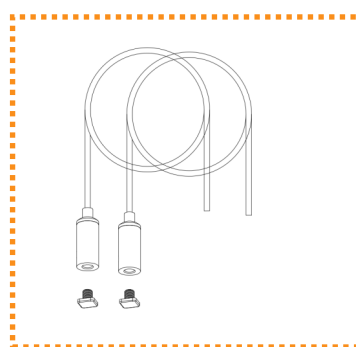


Aircraft Cable




2.4G Wireless Control

Luminaire Photometric:

Luminous Intensity Distribution Diagram

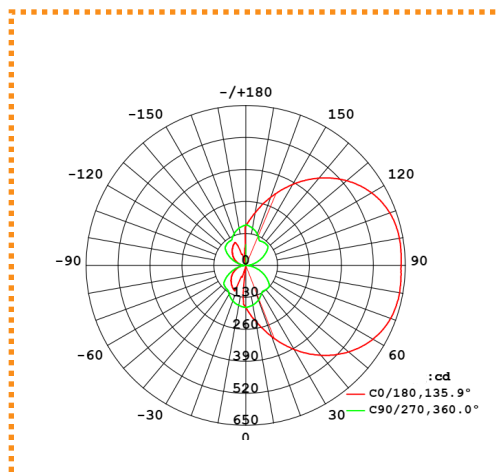

Cone Illuminance Diagram

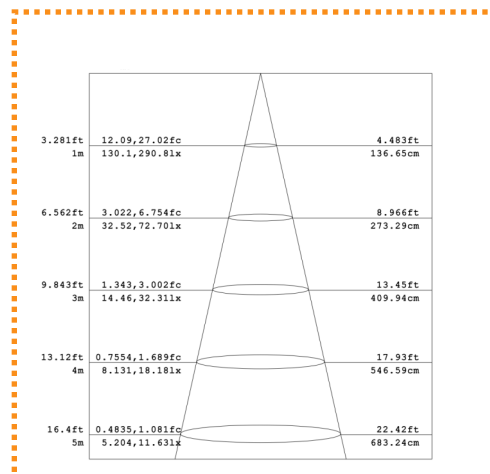

Direct & Indirect LED Slim-Line Linear Light (T=0.63inch)

Product Models

MODEL	WL-SSUD3FT25WADHV-XXK-XX-XX	WL-SSUD4FT36WXHV-XXK-XX-XX
PERFORMANCE SUMMARY		
Input Wattage	25W(Up 7W,Down 18W)	36W(Up 11W,Down 25W)
Input Voltage	120-347V	
Delivered Lumens	2625Lm	3780Lm
Efficacy	105lm/W	
CRI	80min	
CCT	3500K,4000K,4500K,5000K	
Power Factor	> 0.9	
THD	< 20%	
Operation Temp	-40°C~+50°C	
Beam Angle	120°	
Material	Aluminum + Acrylic	
Beam Angle	120°	
Finish	Black, White, Satin Aluminum, (Custom Finish available)	
Installation	Suspend	
LIGHTING CONTROL		
Dimming Capacity	0-10V dimming ,2.4G,DALI	
DIMENSION		
Product Dimension	900*96*16mm (Driver Box: 502*70*40.6)mm	1200*114*16mm (Driver Box: 502*70*40.6mm)
Packing Dimension		
LONGEVITY & WARRANTY		
L80 Life	>50000hrs	
Warranty	5 Years	

Note:The first "XX" in the model means CCT ,can be 35,40,45,50;the second "XX" means the finish color,can be WH,BK ,SA,or CF,BK=Black,WH=White,SA=Satin Aluminum,CF=Custom Finish;the last "XX" means different mounting ways,can be SP=Suspended aircraft cable WM=Wall Mount.

WL-SSUD Series



Direct & Indirect LED Slim-Line Linear Light (T=0.63inch)

Order Information :

Eg: WL-SSUD3FT25WADHV-35K-WH-SP

Product Family	Product Name	Length	Watt	Series	Dimming	Voltage	CCT	Finishing	Mounting Options	Controls
WL= Wisdom Light	SSUD= Direct & Indirect Architecture Linear Light	3FT= 3 feet 4FT= 4 feet	25W 36W	A=Single CCT	D=0-10V	HV= 120-347V	35K=3500K 40K=4000K 45K=4500K 50K=5000K	BK=Black WH=White SA=Satin Aluminum CF=Custom Finish	SP=Suspended aircraft cable WM=Wall Mount	MS=Motion Sensor BM=Bluetooth Mesh EM=Emergency Backup 2.4=2.4G wireless Blank=No any function